

THE DISPLAY CHOICE
OF PROFESSIONALS™

AG neovo

Product Catalogue

2019



Inside This Brochure

> Engineered to Perform, Built to Last

Security & Surveillance	2
Digital Signage	2
Professional Desktop / IT	2
Video Wall	3
Meeting & Collaboration	3

> AG Neovo Innovations

NeoV™ Optical Glass	4
Anti-Burn-in™ Technology	5

> Product Specifications

Large Format	6
4K UHD	10
Security & Surveillance	14
Broadcasting	18
Healthcare	20
Interactive	22
Conference and Meeting	24
Professional Desktop / IT	26
Display Mounts & Enclosures	30

Engineered to Perform, Built to Last.

You'll find AG Neovo displays performing reliably in places where few would dare use a monitor. That's because unlike conventional desktop monitors, AG Neovo displays are created to meet the needs of demanding public and professional environments. Combining advanced technologies, innovative feature sets and a distinctive design, AG Neovo is changing how the world views displays.

Security & Surveillance

Security and surveillance operations around the world need equipment that matches the complex requirements of modern security systems, as well as stand up to the rigours of operating 24 hours a day, 7 days a week while preventing image burn-in. That is why AG Neovo provides the most comprehensive range of displays that are designed to deliver the flexibility and durability suitable for even the most stringent security environments.

Digital Signage

With more than 20 years of experience in display and video signal control solutions, AG Neovo provides digital signage solutions that are designed for 24/7 operation in all public environments. These solutions deliver a superior viewing experience and a high-level of protection with a wide variety of possible configurations perfect for retail, education, hospitality, transportation, corporations and healthcare institutions.

Professional Desktop / IT

AG Neovo offers a variety of display types, from everyday office use models with ergonomic stands and multitasking features to professional medical-grade displays that are compliant with multiple standards and safety certifications to ensure their reliable performance. Attractive, durable and versatile, AG Neovo professional desktop and IT displays are designed to meet the demands of unique environments.

Video Wall

Using multiple panels working in tandem, video walls offer businesses the ability to make an immediate impact in public spaces by creating eye-catching experiences that draw the viewer's attention at first glance. At the same time, they also give businesses the opportunity to optimise their creativity and messaging by delivering enhanced visuals beyond that which is available with single-display signage. Furthermore, from massive walls to more intimate setups, the scalability of video walls guarantee that businesses are able to create customised solutions that suit their needs.


Meeting & Collaboration

Meeting room and interactive applications demand detailed and clear image presentation; by adding multitouch capability and 4K UHD resolution, a screen becomes the centerpiece for collaborative working environments with wireless presentation connectivity for instant participation. By partnering with unique software partners for content sharing and advanced collaboration, AG Neovo's all-in-one meeting & collaboration solution, the AG Neovo Meetboard™, offers all the tools needed for presenting, collaborating and sharing ideas right out-of-the-box.

NeoV™ Optical Glass

The most advanced and trusted hard glass protection available.


NeoV™ Optical Glass is a specially formulated, hardened optical – with a proprietary multilayer coating – to enhance image quality and protect the screen from any incidental damage incurred in high-volume environments.

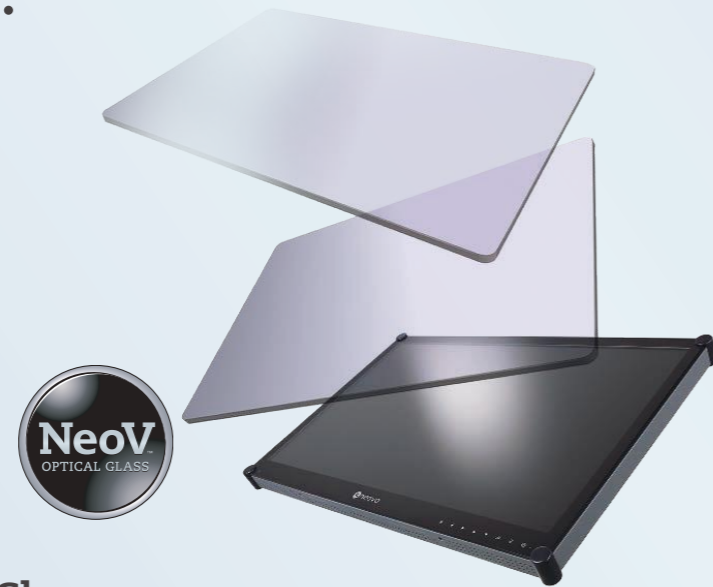

Advantages of NeoV™ Optical Glass

Anti-Scratch Surface

Provides unparalleled resistance to scratches; the coated surface of NeoV™ Optical Glass reaches 9H, the highest grade on the pencil hardness scale.

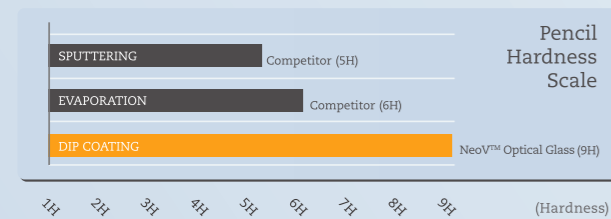

Anti-Reflection

Effectively decreases glare and reflection; results in 77.3% visual improvement over standard glass and improved viewing comfort.




High Impact Resistance

Prevent panels from physical damage caused by accidental crash; resist force up to 227g steel ball free-falling from a height of 200cm.



Water and Dust Resistance

Protect panels from dust and water; prolong displays life performance in dusty and damp environments.




Maintenance Made Easy

Easily cleaned and disinfected with water, alcohol and other common cleaning solutions due to high resistance towards abrasion, acid and alkali.



High Transmittance

Provides near perfect panel brightness with a 97.7% transmittance rate, compared to an average 91% transmittance rate for competitors' products.

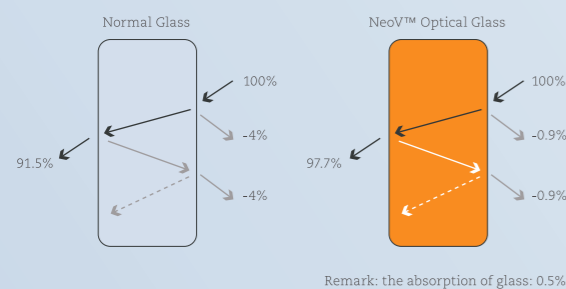

Anti-Burn-in™ Technology

Preserve image quality and prevent image retention.

AG Neovo Anti-Burn-in™ technology is designed expressly to protect your investment by preventing costly image burn-in in the display's LCD panel, a common issue in security, surveillance and other environments where static images are display long periods of time.



Advantages of Anti-Burn-in™ Technology

Prevents Image Burn-in

Eliminates the possibility of image burn-in through innovative design that can be turned ON or OFF as desired.



(w/o Anti-Burn-in™ Technology)



(w/ Anti-Burn-in™ Technology)



What is "Burn-in" effect?

"Burn-in" effect is a phenomenon where images displayed for long periods of time cause the polarisation of the liquid crystal material contained within the TFT LCD panel. Polarisation of the liquid crystal material causes the image to be 'burnt' on the display.

Continuous Surveillance

Ensures uninterrupted display of surveillance video by shifting the image imperceptibly for 15 seconds every 8 hours rather than using a screensaver function.

Uninterrupted
DISPLAY

Investment Protection

Guarantees full life operation of the display by eliminating the possibility damage caused by image burn-in.

Investment
Guaranteed

Large Format

Different industries require different formats for display selection. Some need wide-screen displays or different display sizes, while some require vertical or slim displays due to the field-site environment limits, still some industries require dual-sided displays for more commercial promotion visibility. Selecting the optimal display among the large format displays has become a crucial task for related professionals.



DX-Series



DF-Series



DS-Series



PF-Series



PN-Series



Specifications	DX-55 MVA	DF-55 VA	DS-55 VA	PF-55H VA	PN-55H IPS	PN-55D IPS	PN-46D VA
TFT Panel Size	55.0"	54.6"	55.0"	55.0"	54.6"	54.6"	46.0"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1080 x 1920	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700/700 cd/m ²	700/700 cd/m ²	700/700 cd/m ²	700 cd/m ²	700 cd/m ²	500 cd/m ²	500 cd/m ²
Contrast Ratio	3000:1	4000:1	3000:1	4000:1	1400:1	1400:1	3500:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	1.07B	1.07B	1.07B	1.07B	1.07B	16.7M
Response Time	6.5 ms	5 ms	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 30 kHz~92 kHz / V: 49 Hz~85 Hz	H: 30 kHz~92 kHz / V: 49 Hz~85 Hz	H: 30 kHz~92 kHz / V: 49 Hz~85 Hz	-	H: 31 kHz~92 kHz / V: 50 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz	H: 31 kHz~92 kHz / V: 48 Hz~85 Hz
Input	HDMI 1.3 x 2	HDMI 1.4 x 2	HDMI 1.4 x 2	HDMI 1.2, DVI, VGA, USB 2.0, Audio (3.5 mm)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, Audio (3.5 mm/RCA)
Output	-	-	-	Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DVI-I, VGA, RS232, IR, Audio (RCA)
Built-in Speakers	-	-	-	10W x 2	10W x 2	10W x 2	10W x 2
Product Dimension With Base (W x H x D)	1012.0 x 2022.0 x 71.0 mm (39.8" x 79.6" x 18.0") (screen)/ 944.0 x 459.0 mm (37.2" x 18.1") (W x D, top view, with base)	952.7 x 2030.7 x 452.4 mm (37.5" x 79.9" x 17.8")	Display 857.4 x 1515.9 x 23.4 mm (33.8" x 59.7" x 0.9") Power Box 280.0 x 406.0 x 55.0 mm (11.0" x 16.0" x 2.2") (without base)	815.0 x 1975.0 x 651.0 mm (32.1" x 77.8" x 25.6")	1213.4 x 684.2 x 107.7 mm (47.8" x 26.9" x 4.2") (without base)	1213.4 x 684.2 x 107.7 mm (47.8" x 26.9" x 4.2") (without base)	1024.0 x 578.6 x 125.7 mm (40.3" x 22.8" x 4.9") (without base)
Product Weight	140.0 kg (308.4 lb)	94.5 kg (207.9 lb)	Display 45.5 kg (100.3 lb) Power Box 4.0 kg (8.8 lb) (without base)	105.0 kg (231.0 lb)	24.9 kg (54.8 lb) (without base)	27.0 kg (59.5 lb) (without base)	23.0 kg (50.7 lb) (without base)
VESA Arm/Wall Mounting	-	-	-	-	400 x 400 mm	400 x 400 mm	400 x 200 mm & 200 x 200 mm
Glass Type	Tempered Glass	-	-	Tempered Glass	-	-	-
Features	71 mm Slim Profile, HDMI Connections for Media Players/IPC, Glass Protected Floating Frame, Mobility	Free Standing and Movable Floor Stand, 23.4 mm Slim Depth Design	Landscape/Portrait Orientation, 23.4 mm Slim Depth Design	67 mm Slim Depth Design, HDMI Connection for Media Player/ IPC, Front-sided Tempered Glass Protection, Mobility	Gamma Selection, USB Playback, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, DMR function, Alink	Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, USB Playback, Gamma Selection, DMR function, Alink	Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection
Remarks	Optional Flight Case (FTC-55E)	Optional IPC	Optional IPC	Optional Touch Screen, USB Port	Optional Stand	Optional Stand	Optional Stand

PD-Series



PM-Series



Specifications	PD-55 IPS	PD-49 IPS	PD-42 IPS	PM-65P VA	PM-55 IPS
TFT Panel Size	54.6"	48.5"	41.9"	64.5"	54.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700 cd/m ²	700 cd/m ²	700 cd/m ²	350 cd/m ²	350 cd/m ²
Contrast Ratio	1300:1	1300:1	1300:1	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	1.07B	1.07B	1.07B	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz
Input	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.3b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4b x 2, DVI, VGA, Composite/Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)
Output	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, RS232, IR, Audio (3.5 mm)	DisplayPort, DVI-I, VGA, RS232, IR, Audio (3.5 mm)	RS232, IR, Audio (RCA)
Built-in Speakers	10W x 2	10W X 2	10W x 2	10W x 2	10W x 2
Product Dimension With Base (W x H x D)	1228.6 x 699.4 x 71.1 mm (48.4" x 27.5" x 2.8") (without base)	1092.8 x 623.0 x 71.1 mm (43.0" x 24.5" x 2.8") (without base)	946.9 x 541.0 x 71.1 mm (37.3" x 21.3" x 2.8") (without base)	1459.0 x 835.0 x 82.0 mm (57.4" x 32.9" x 3.2") (without base)	1238.6 x 711.1 x 59.9 mm (42.6" x 24.5" x 2.4") (without base)
Product Weight	24.7 kg (54.5 lb) (without base)	19.0 kg (41.9 lb) (without base)	15.3 kg (33.7 lb) (without base)	24.8 kg (54.7 lb) (without base)	16.0 kg (35.3 lb) (without base)
VESA Arm/Wall Mounting	400 x 400 mm	400 x 400 mm	200 x 200 mm	400 x 400 mm	400 x 400 mm & 400 x 200 mm
Glass Type	-	-	-	-	-
Features	Tiling, USB Playback, Scheduling, Heat Control Sensor, Landscape/Portrait Orientation, Gamma Selection, DMR function, Alink	Tiling, USB Playback, Scheduling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection, DMR function, Alink	Tiling, USB Playback, Scheduling, HeatControl Sensor, Landscape/Portrait Orientation, Gamma Selection, DMR function, Alink	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, Tiling, DMR Function, Alink	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function
Remarks	Optional Stand	Optional Stand	Optional Stand	Optional Stand	Optional Stand

PM-Series



PO-Series



Specifications	PM-48 VA	PM-43 VA	PM-32 IPS	PO-55H	PO-55F
TFT Panel Size	47.6"	42.5"	31.5"	54.6"	54.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	350 cd/m ²	350 cd/m ²	350 cd/m ²	2500 cd/m ²	2500 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	4000:1	4000:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	16.7M	16.7M	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 30 kHz-80 kHz / V: 56 Hz-76 Hz	H: 30 kHz-80 kHz / V: 56 Hz-76 Hz
Input	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	HDMI 1.3b, DVI, VGA, Composite (BNC), Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)
Output	RS232, IR, Audio (3.5 mm)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	Audio (3.5 mm)	Audio (3.5 mm)
Built-in Speakers	10W x 2	10W x 2	10W X 2	10W x 2	-
Product Dimension With Base (W x H x D)	1081.8 x 623.4 x 59.9 mm (42.6" x 24.5" x 2.4") (without base)	968.2 x 559.4 x 59.9 mm (38.1" x 22.0" x 2.4") (without base)	726.5 x 425.4 x 64.0 mm (28.6" x 16.7" x 2.5") (without base)	1248.2 x 719.0 x 119.0 mm (49.1" x 28.3" x 4.7") (without base)	1242.2 x 713.0 x 117.8 mm (48.9" x 28.0" x 4.6") (without base)
Product Weight	11.5 kg (25.4 lb) (without base)	8.7 kg (19.1 lb) (without base)	5.2 kg (11.5 lb) (without base)	36.7 kg (80.9 lb) (without base)	29.2 kg (64.4 lb) (without base)
VESA Arm/Wall Mounting	400 x 400 mm & 400 x 200 mm	400 x 400 mm & 200 x 200 mm	200 x 200 mm & 100 x 100 mm	400 x 400 mm	400 x 400 mm
Glass Type	-	-	-	-	-
Features	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function	Gamma Selection, USB Playback, Scheduling, 16/7 Operation, DMR Function	Height Adjustable Stand, HeatControl Sensor	Height Adjustable Stand, HeatControl Sensor
Remarks	Optional Stand	Optional Stand	Optional Stand	-	-

4K UHD


With the development of the modern technology, requirements for the high resolution displays have become much higher than before. Users keep looking for the displays that come with detailed image quality, particularly for the applications that demand high-resolution image visibility, such as commercial digital signage usage or the security and surveillance applications that require real-time and up-close monitoring of video and graphic information. Providing the reliable 4K/UHD displays has become crucial for product suppliers.



	QX-Series				QD-Series											
Specifications	QX-55 VA	QX-43 VA	QX-32 VA	QX-28	QX-24 VA	QD-98 IPS	QD-84 IPS	QD-75 IPS								
TFT Panel Size	54.6"	42.5"	32.0"	27.9"	23.8"	97.5"	84.0"	74.5"								
Max. Resolution	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160								
Brightness	450 cd/m ²	500 cd/m ²	350 cd/m ²	300 cd/m ²	300 cd/m ²	500 cd/m ²	500 cd/m ²	410 cd/m ²								
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	1300:1	1400:1	1200:1								
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	170°/160°	178°/178°	178°/178°	178°/178°	178°/178°								
Display Colour	1.07B	16.7M	1.07B	1.07B	1.07B	1.07B	1.07B	1.07B								
Response Time	5 ms	5 ms	5 ms	3 ms	5 ms	5 ms	5 ms	5 ms								
Frequency (H/V)	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 32 kHz-91 kHz / V: 56 Hz-75 Hz								
Input	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0, DVI, VGA, RS232, RJ45, USB 2.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0 x 3, DVI, VGA, Composite (BNC)/Component (RCA), RJ45, IR, USB 2.0, RS232, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 2.0 x 3, DVI, VGA, Composite (BNC)/Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 2.0 x 3, DVI, VGA, Composite (BNC)/Component (RCA), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm), Audio (3.5 mm/RCA)								
Output	-	-	-	-	-	DisplayPort 1.2, RS232, IR, Audio (3.5 mm/S/PDIF)	DisplayPort 1.2, RS232, IR, Audio (3.5 mm/S/PDIF)	DisplayPort 1.2, RS232, IR, Audio (3.5 mm/S/PDIF)								
Built-in Speakers	10W x 2	10W x 2	10W x 2	3W x 2	3W x 2	10W x 2	10W x 2	10W x 2								
Product Dimension With Base (W x H x D)	1271.0 x 742.0 x 87.0 mm (50.0" x 29.2" x 3.4") (without base)	1002.5 x 589.6 x 87.0 mm (39.5" x 23.2" x 3.4") (without base)	771.0 x 461.0 x 77.0 mm (30.4" x 18.1" x 2.8") (without base)	681.0 x 565.5 x 270.0 mm (26.8" x 22.3" x 10.6")	572.6 x 514.0 x 270.0 mm (22.5" x 20.2" x 10.6")	2193.2 x 1248.2 x 89.8 mm (86.4" x 49.1" x 3.5") (without base)	1910.0 x 1102.0 x 77.8 mm (75.2" x 43.4" x 3.1") (without base)	1676.6 x 955.0 x 73.8 mm (66.0" x 37.6" x 2.9") (without base)								
Product Weight	39.1 kg (86.2 lb) (without base)	27.1 kg (59.7 lb) (without base)	15.7 kg (34.6 lb) (without base)	13.3 kg (29.3 lb)	10.1 kg (22.3 lb)	92.0 kg (202.6 lb) (without base)	70.0 kg (154.3 lb) (without base)	53.3 kg (117.3 lb) (without base)								
VESA Arm/Wall Mounting	400 x 400 mm & 400 x 200 mm	400 x 400 mm & 400 x 200 mm	200 x 200 mm & 400 x 200 mm	100 x 100 mm & 100 x 200 mm	100 x 100 mm & 100 x 200 mm	800 x 500 mm	600 x 500 mm	600 x 400 mm								
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	-	-	-								
Features	Blue-light Filter, HeatControl Sensor, EcoSmart Sensor, Landscape/Portrait Orientation	Blue-light Filter, HeatControl Sensor, EcoSmart Sensor, Landscape/Portrait Orientation	Blue-light Filter, HeatControl Sensor, EcoSmart Sensor	Blue-light Filter, Landscape/Portrait Orientation, EcoSmart Sensor, Flicker Free	Blue-light Filter, Landscape/Portrait Orientation, EcoSmart Sensor, Flicker Free	Gamma Selection, Black-level Adjustment, USB Playback, Tiling, HeatControl Sensor, Scheduling, Handles, Landscape/Portrait Orientation	Gamma Selection, Black-level Adjustment, USB Playback, Tiling, HeatControl Sensor, Scheduling, Handles, Landscape/Portrait Orientation	Gamma Selection, Black-level Adjustment, USB Playback, Tiling, HeatControl Sensor, Scheduling, Handles, Landscape/Portrait Orientation								
Remarks	-	-	-	-	-	-	-	-								

All specifications are subject to change without prior notice.

QM-Series



QF-Series



Specifications	QM-86 VA	QM-75 VA	QM-65 VA	QM-55 VA	QM-43 VA	QF-28
TFT Panel Size	85.6"	74.5"	64.5"	54.6"	42.5"	27.9"
Max. Resolution	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160	UHD 3840 x 2160
Brightness	410 cd/m ²	410 cd/m ²	350 cd/m ²	350 cd/m ²	350 cd/m ²	300 cd/m ²
Contrast Ratio	1200:1	1200:1	4000:1	4000:1	5000:1	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	176°/176°	170°/160°
Display Colour	1.07B	1.07B	1.07B	1.07B	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms	3 ms
Frequency (H/V)	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 30 kHz-160 kHz / V: 23 Hz-80 Hz
Input	DisplayPort 1.2, HDMI 2.0 x 4, VGA, RS232, RJ45, IR, USB 2.0 x 2, USB 3.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0 x 4, VGA, RS232, RJ45, IR, USB 2.0 x 2, USB 3.0, Audio (3.5 mm)	DisplayPort 1.2, HDMI 2.0 x 4, VGA, RS232, RJ45, IR, USB 2.0 x 2, USB 3.0, Audio (3.5 mm)	HDMI 2.0 x 2, DVI, VGA, RS232, RJ45, IR, USB 2.0, USB 3.0, Audio (3.5 mm)	HDMI 2.0 x 2, DVI, VGA, RS232, RJ45, IR, USB 2.0, USB 3.0, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, USB 3.0 x 2, USB 2.0 x 2, Audio (3.5 mm)
Output	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	RS232, IR, Audio (RCA)	Audio (3.5 mm)
Built-in Speakers	10W x 2	10W x 2	10W x 2	10W x 2	10W x 2	3W x 2
Product Dimension With Base (W x H x D)	1927.9 x 1098.9 x 85.9 mm (75.9" x 43.3" x 3.4") (without base)	1676.6 x 955.0 x 73.8 mm (66.0" x 37.6" x 2.9") (without base)	1458.7 x 834.7 x 81.6 mm (54.7" x 32.9" x 3.2") (without base)	1239.2 x 711.6 x 61.7 mm (48.8" x 28.1" x 2.4") (without base)	968.2 x 559.4 x 59.9 mm (38.1" x 22.0" x 2.4") (without base)	659.7 x 555.4 x 224.5 mm (26.0" x 21.9" x 8.8")
Product Weight	63.8 kg (140.7 lb) (without base)	53.0 kg (116.8 lb) (without base)	24.8 kg (54.7 lb) (without base)	16.0 kg (35.3 lb) (without base)	8.7 kg (19.2 lb) (without base)	7.9 kg (17.4 lb)
VESA Arm/Wall Mounting	600 x 400 mm	600 x 400 mm	400 x 400 mm	400 x 400 mm & 400 x 200 mm	400 x 400 mm & 200 x 200 mm	100 x 100mm
Glass Type	-	-	-	-	-	-
Features	Gamma Selection, USB Playback, OPS Slot, HeatControl Sensor, Alink	Gamma Selection, USB Playback, OPS Slot, HeatControl Sensor, Alink	Gamma Selection, USB Playback, OPS Slot, HeatControl Sensor, Alink	Gamma Selection, USB Playback, HeatControl Sensor, Alink	Gamma Selection, USB Playback, HeatControl Sensor, Alink	USB Hub, Height Adjustable Stand (tilt, pivot, swivel)
Remarks	-	-	Optional Stand	Optional Stand	Optional Stand	-

Security & Surveillance

As technology advances and a greater number of surveillance options become available, many security professionals are looking to reap the benefits from new display technology. While factors such as objectives, location, scale, and budget often dictate the type of display solutions adopted, qualities such as reliability, efficiency, and longevity remain mainstays in purchasing decisions for organisations.



RX-Series



Specifications	RX-55E IPS	RX-42E IPS	RX-32E VA	RX-24E VA	RX-22E VA
TFT Panel Size	54.6"	41.9"	31.5"	23.6"	21.5"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700 cd/m ²	700 cd/m ²	500 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio	1300:1	1300:1	3000:1	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	1.07B	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz
Input	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)
Output	DisplayPort 1.2, DVI, Composite (BNC), RS232, IR, Audio (3.5 mm)	DisplayPort 1.2, DVI, Composite (BNC), RS232, IR, Audio (3.5 mm)	DisplayPort 1.2, DVI, Composite (BNC), RS232, IR, Audio (3.5 mm)	Composite (BNC), Audio (RCA)	Composite (BNC), Audio (RCA)
Built-in Speakers	10W x 2	10W x 2	10W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	1268.8 x 739.6 x 83.0 mm (50.0" x 29.1" x 3.3") (without base)	987.2 x 581.2 x 83.0 mm (38.9" x 22.9" x 3.3") (without base)	757.6 x 452.0 x 75.1 mm (29.8" x 17.8" x 3.0") (without base)	562.0 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1")	513.0 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")
Product Weight	37.0 kg (81.6 lb) (without base)	23.1 kg (50.9 lb) (without base)	15.0 kg (33.1 lb) (without base)	7.9 kg (17.4 lb)	6.8 kg (15.0 lb)
VESA Arm/Wall Mounting	400 x 400 mm	200 x 200 mm	400 x 200 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass
Features	Gamma Selection, OPS Slot, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor	Gamma Selection, OPS Slot, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor	Gamma Selection, Scheduling, Tiling, Landscape/Portrait Orientation, EcoSmart Sensor	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Front-sided IP22	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Front-sided IP22
Remarks	Optional Stand	Optional Stand	Optional Stand	Available in black and white, Optional Stand	Available in black and white, Optional Stand

All specifications are subject to change without prior notice.

SG-Series



Specifications	SC-55E VA	SC-42E VA	SC-32E IPS	SC-27E VA	SC-24E IPS
TFT Panel Size	55.0"	42.5"	31.5"	27.0"	23.8"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	350 cd/m ²	300 cd/m ²	300 cd/m ²	300 cd/m ²	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 30 kHz-81 kHz / TBC	H: 30 kHz-81 kHz / V: 56 Hz-63 Hz	H: 30 kHz-80 kHz / V: 56 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz
Input	HDMI 1.4, DVI, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)	HDMI 1.4, DVI, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)	HDMI 1.4, DVI, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)
Output	Composite (BNC), Audio (3.5 mm)	Composite (BNC), Audio (3.5 mm)	Composite (BNC), Audio (3.5 mm)	Composite (BNC), Audio (3.5 mm)	Composite (BNC), Audio (3.5 mm)
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	1243.7 x 721.0 x 80.3 mm (49.0" x 28.4" x 3.2") (without base)	967.0 X 638.7 X 236.8 mm (38.1" x 25.1" x 9.3") (without base)	728.8 x 540.3 x 236.8 mm (28.7" x 21.3" x 9.3") (without base)	611.9 x 454.7 x 238.7 mm (24.1" x 17.9" x 9.4")	540.6 x 396.1 x 194.0 mm (21.3" x 15.6" x 7.6")
Product Weight	TBC	TBC	6.6 Kg (14.6 lb) (without base)	5.3 kg (11.7 lb)	3.8 kg (8.2 lb)
VESA Arm/Wall Mounting	400 x 200 mm	400 x 200 mm & 100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Glass Type	-	-	-	-	-
Features	-	-	-	Gamma Selection , Black-level Adjustment, Flicker Free, Alink	Gamma Selection , Black-level Adjustment, Flicker Free, Alink
Remarks	-	-	-	-	-

SG-Series



Specifications	SC-22E	SC-19E	SX-19E	SX-17E	SX-15E VA
TFT Panel Size	21.5"	18.5"	19.0"	17.0"	15.0"
Max. Resolution	FHD 1920 x 1080	1366 x 768	SXGA 1280 x 1024	SXGA 1280 x 1024	XGA 1024 x 768
Brightness	250 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°	170°/160°	170°/160°	170°/160°	176°/176°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.2 M
Response Time	3 ms	3 ms	3 ms	3 ms	5 ms
Frequency (H/V)	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-81 kHz / V: 50 Hz-75 Hz	H: 24 kHz-81 kHz / V: 50 Hz-75 Hz	H: 24 kHz-81 kHz / V: 50 Hz-75 Hz
Input	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)	HDMI 1.4, VGA, Composite (BNC), USB 2.0, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC) x 2, S-Video, RS232, USB 2.0, Audio (3.5 mm/RCA)
Output	Composite (BNC), Audio (3.5 mm)	Composite (BNC), Audio (3.5 mm)	Composite (BNC) x 2, Audio (RCA)	Composite (BNC) x 2, Audio (RCA)	Composite (BNC) x 2, Audio (RCA)
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	505.2 x 380.8 x 194.0 mm (19.9" x 15.0" x 7.6")	441.9 x 356.2 x 194.0 mm (17.4" x 14.0" x 7.6")	445.4 x 420.2 x 175.0 mm (17.5" x 16.5" x 6.9")	409.4 x 398.2 x 175.0 mm (16.1" x 15.7" x 6.9")	380.0 x 359.0 x 155.0 mm (15.0" x 14.1" x 6.1")
Product Weight	2.8 kg (6.2 lb)	2.3 kg (5.1 lb)	7.0 kg (15.4 lb)	6.1 kg (13.4 lb)	4.7 kg (10.4 lb)
VESA Arm/Wall Mounting	100 x 100 mm	100 x 100 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm
Glass Type	-	-	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass
Features	Gamma Selection , Black-level Adjustment, Flicker Free, Alink	Gamma Selection , Black-level Adjustment, Flicker Free, Alink	Gamma Selection, EcoSmart Sensor, Front-sided IP22	Gamma Selection, EcoSmart Sensor, Front-sided IP22	Gamma Selection, EcoSmart Sensor, Front-sided IP22, Flicker Free
Remarks	-	-	-	-	-

SX-Series



Broadcasting

Broadcast environments combine multiple live feeds to produce programming, monitor and control television broadcasts. Constant monitoring of real-time content in this demanding environment makes reliability critical to ensure system long-life and uptime. AG Neovo professional displays are designed and built for non-stop 24/7 operation. The hard-wrought metal casing industrial designs, meticulously selected components coupled with the robust protection of NeoV™ Optical Glass and Anti-Burn-in™ proprietary technologies set AG Neovo displays apart in environments where downtime is not an option.



HX-Series



Specifications	HX-55E IPS	HX-42E IPS	HX-32E IPS	HX-24E VA
TFT Panel Size	54.6"	41.9"	31.5"	23.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	700 cd/m ²	700 cd/m ²	500 cd/m ²	250 cd/m ²
Contrast Ratio	1300:1	1300:1	3000:1	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°
Display Colour	1.07B	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	5 ms	5 ms
Frequency (H/V)	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 31 kHz-92 kHz / V: 48 Hz-85 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz
Input	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite/3G-SDI (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite/3G-SDI (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio (3.5 mm/RCA)	DisplayPort 1.2, HDMI 1.4 x 2, DVI, VGA, Composite/3G-SDI (BNC), Component (BNC), RS232, RJ45, IR, USB 2.0, Audio(3.5 mm/RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite (BNC), RS232, USB 2.0, Audio (3.5 mm/RCA)
Output	DisplayPort, DVI, Composite/3G-SDI (BNC), RS232, IR, Audio (3.5 mm)	DisplayPort, DVI, Composite/3G-SDI (BNC), RS232, IR, Audio (3.5 mm)	DisplayPort, DVI, Composite/3G-SDI (BNC), RS232, IR, Audio (3.5 mm)	Composite (BNC), 3G-SDI (BNC), Audio (RCA)
Built-in Speakers	10W x 2	10W x 2	10W x 2	2W x 2
Product Dimension With Base (W x H x D)	1268.8 x 739.6 x 83.0 mm (50.0" x 29.1" x 3.3") (without base)	987.2 x 581.2 x 83.0 mm (38.9" x 22.9" x 3.3") (without base)	757.6 x 452.0 x 75.1 mm (29.8" x 17.8" x 3.0") (without base)	562.4 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1") (without base)
Product Weight	37.1 kg (81.8 lb) (without base)	23.2 kg (51.1 lb) (without base)	15.2 kg (33.5 lb) (without base)	7.9 kg (17.4 lb) (without base)
VESA Arm/Wall Mounting	400 x 400 mm	200 x 200 mm	400 x 200 mm	100 x 100 mm & 75 x 75 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass
Features	Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor, Alink	SDI (3G-SDI, HD-SDI, SD-SDI) Signal Looping, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor, Alink	SDI (3G-SDI, HD-SDI, SD-SDI) Signal Looping, Scheduling, Tiling, HeatControl Sensor, Landscape/Portrait Orientation, EcoSmart Sensor, Alink	Gamma Selection, SDI (3G-SDI, HD-SDI, SD-SDI) Signal Looping, EcoSmart Sensor, Auto Detect Video Signal, Front-sided IP22
Remarks	Optional Stand	Optional Stand	Optional Stand	-

Healthcare

The displays used in medical scenarios usually require flexibility and easy field-site installation. Besides, these displays need to be EN/IEC 60601-1-certified, ensuring a safety medical environment for both patients and clinical professionals. Meanwhile, image clarity is also a crucial factor for bringing the detailed images and visual presentations for medical survey and accurate diagnosis. Suppliers need to use the advanced technology and provide the reliable displays for increasing medical accuracy and efficiency.



MX-Series



DR-Series



MD-Series



Specifications	MX-24	MX-22	DR-22E VA	DR-17E	MD-27 VA	MD-24 IPS
TFT Panel Size	23.5"	21.5"	21.5"	17.0"	27.0"	23.8"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	SXGA 1280 x 1024	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	300 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°	170°/160°	178°/178°	170°/160°	178°/178°	178°/178°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	3 ms	3 ms	5 ms	3 ms	5 ms	5 ms
Frequency (H/V)	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-81 kHz / V: 50 kHz-75 kHz	H: 30 kHz-85 kHz / V: 45 Hz-76 Hz	H: 30 kHz-85 kHz / V: 45 Hz-76 Hz
Input	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Composite x 2 (BNC), S-Video, USB 2.0, RS232, Audio (3.5 mm / RCA)	DisplayPort, HDMI 1.4, DVI, VGA, Composite x 2 (BNC), S-Video, USB 2.0, RS232, Audio (3.5 mm / RCA)	HDMI 1.4, VGA, Audio (3.5 mm)	HDMI 1.4, VGA, Audio (3.5 mm)
Output	-	-	Composite x 2 (BNC), Audio (RCA)	Composite x 2 (BNC), Audio (RCA)	-	-
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	562.4 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1")	513.2 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")	513.2 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")	409.4 x 398.2 x 175.0 mm (16.1" x 15.7" x 6.9")	611.9 x 518.7 x 249.0 mm (24.1" x 20.4" x 9.8")	540.6 x 498.6 x 249.0 mm (21.3" x 19.6" x 9.8")
Product Weight	7.8 (17.2 lb)	6.7 kg (14.7 lb)	6.8 kg (15.0 lb)	6.1 kg (13.4 lb)	6.6 kg (14.5 lb)	5.7 kg (12.5 lb)
VESA Arm/Wall Mounting	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm	100 x 100 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	-	-
Features	DICOM Part 14, Gamma Selection, EcoSmart Sensor, Front-sided IP22	DICOM Part 14, Gamma Selection, EcoSmart Sensor, Front-sided IP22	Illuminator Mode, DC 24V Power Supply, Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Equipotential Terminal, Front-sided IP22	Illuminator Mode, DC 24V Power Supply, Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Equipotential Terminal, Front-sided IP22	Ergonomically-designed Stand; EN60601-1, IEC60601-1, Landscape/Portrait Orientation	Ergonomically-designed Stand; EN60601-1, IEC60601-1, Landscape/Portrait Orientation
Remarks	Optional Display Handle (HDL-02)	Optional Display Handle (HDL-02)	Optional Display Handle (HDL-02)	Optional Display Handle (HDL-01)	-	-

Interactive

Touch panels and displays have recently become a main industry where it requires a direct and interactive contact between users and the displays. It needs highly sensitive and reliable panel for the media to perform the command, and requires advanced technology knowledge to provide the reliability product to increase communication performance and efficiency.



TX-Series



TM-Series



Specifications	TX-42P VA	TX-32P VA	TX-22 IPS	TX-19 IPS	TX-17 VA	TX-15	TM-23 IPS	TM-22	
TFT Panel Size	42.0"	31.5"	21.5"	18.9"	17.0"	15.0"	23.0"	21.5"	
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	SXGA 1280 x 1024	SXGA 1280 x 1024	XGA 1024 x 768	FHD 1920 x 1080	FHD 1920 x 1080	
Brightness	500 cd/m ²	500 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	350 cd/m ²	250 cd/m ²	250 cd/m ²	
Contrast Ratio	4000:1	3000:1	1000:1	1000:1	1000:1	800:1	20,000,000:1 (DCR)	20,000,000:1 (DCR)	
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°	178°/178°	170°/160°	160°/150°	178°/178°	170°/160°	
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M	16.2M	16.7M	16.7M	
Response Time	5 ms	5 ms	5 ms	5 ms	3 ms	5 ms	5 ms	3 ms	
Frequency (H/V)	H: 30 kHz~80 kHz / V: 56 Hz~76 Hz	H: 30 kHz~80 kHz / V: 50 Hz~76 Hz	H: 31 kHz~82 kHz / V: 50 Hz~75 Hz	H: 31 kHz~80 kHz / V: 50 Hz~75 Hz	H: 31 kHz~80 kHz / V: 50 Hz~75 Hz	H: 31.47 kHz~60.02 kHz / V: 55 Hz~75 Hz	H: 30 kHz~83 kHz / V: 50 Hz~76 Hz	H: 30 kHz~83 kHz / V: 50 Hz~76 Hz	
Input	HDMI 1.4, DVI, VGA, RS232, Audio (3.5 mm)	HDMI 1.4, DVI, VGA, RS232, Audio (3.5 mm)	DVI, VGA, RJ11	DVI, VGA, RJ11	DVI, VGA, RJ11	DVI, VGA, RJ11	DisplayPort, HDMI 1.3, VGA, USB HUB (3.0 x 4), Audio (3.5 mm)	DisplayPort, HDMI 1.3, VGA, USB HUB (3.0 x 4), Audio (3.5 mm)	
Output	Audio (3.5 mm)	Audio (3.5 mm)	-	-	-	USB 2.0 Type B Touch Port	-	-	
Built-in Speakers	10W x 2	10W x 2	-	-	-	-	2W x 2	2W x 2	
Product Dimension With Base (W x H x D)	978.5 x 578.2 x 82.1 mm (38.5" x 22.8" x 3.2") (without base)	750.2 x 466.8 x 69.6 mm (29.5" x 18.4" x 2.7") (without base)	528.6 x 346.7 x 214.2 mm (20.8" x 13.7" x 8.4")	427.0 x 374.6 x 214.2 mm (16.8" x 14.7" x 8.4")	380.0 x 343.4 x 214.2 mm (15.0" x 13.5" x 8.4")	348.4 x 312.7 x 214.2 mm (13.7" x 12.3" x 8.4")	561.0 x 400.0 x 238.5 mm (22.1" x 15.7" x 9.4")	522.4 x 387.4 x 238.5 mm (20.6" x 15.3" x 9.4")	
Product Weight	24.5 kg (54.0 lb) (without base)	12.5 kg (27.6 lb) (without base)	6.7 kg (14.8 lb)	6.5 kg (14.3 lb)	5.8 kg (12.8 lb)	4.6 kg (10.1 lb)	6.6 kg (14.6 lb)	6.3 kg (13.9 lb)	
VESA Arm/Wall Mounting	400 x 400 mm	400 x 200 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	
Glass Type	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass	Tempered Glass	
Features	Projected Capacitive Touch Technology, EcoSmart Sensor, Scheduling, Landscape/Portrait Orientation	Projected Capacitive Touch Technology, EcoSmart Sensor, Scheduling, Landscape/Portrait Orientation	Projected Capacitive Touch Technology, Front-sided IP65 Rating, RJ11 for optional OSD external remote control	Projected Capacitive Touch Technology, RJ11 for optional OSD external remote control	Projected Capacitive Touch Technology, RJ11 for optional OSD external remote control	Projected Capacitive Touch Technology, RJ11 for optional OSD external remote control	Projected Capacitive Touch Technology, Dual-hinge Stand	Projected Capacitive Touch Technology, Dual-hinge Stand	
Remarks	10-point touch for Windows 10, Android (Kernel 3.8+), Linux (Kernel 3.8+) by plug & play, Mac10.7~Mac10.13 by UPDD Driver (UPDD_06_00_376)	10-point touch for Windows 10, Android (Kernel 3.8+), Linux (Kernel 3.8+) by plug & play, Mac10.7~Mac10.13 by UPDD Driver (UPDD_06_00_376)	10-point touch for Windows 10 by plug & play, Android 2.1+ & 4.0 by driver 5-point touch for Linux by driver Front-Sided IP65 White model with medical-grade DV 12V power adapter	10-point touch for Windows 10 by plug & play, Android 2.1+ & 4.0 by driver 5-point touch for Linux by driver	10-point touch for Windows 10 by plug & play, Android 2.1+ & 4.0 by driver 5-point touch for Linux by driver	10-point touch for Windows 10 by plug & play, Android 2.1+ & 4.0 by driver 5-point touch for Linux by driver	10-point touch for Windows 10 by plug & play, Android 2.1+ & 4.0 by driver 5-point touch for Linux by driver	10-point touch for Windows 10 by plug & play	10-point touch for Windows 10 by plug & play

All specifications are subject to change without prior notice.

Conference and Meeting

The AG Neovo Meetboard™ 4K UHD Interactive Displays are designed for meeting rooms and interactive applications that require detailed and clear image presentation. With its embedded interactive whiteboard and media streaming software, the Meetboard™ delivers out-of-the-box collaboration and sharing capabilities for modern meeting rooms and boardrooms. Its versatile connectivity options including HDMI, VGA, USB, RS232, and RJ45 provide a complete computing solution for annotation and media playback without the need for a PC.



IFP-Series




Specifications	IFP-6501	IFP-5501
TFT Panel Size	64.5"	54.6"
Max. Resolution	UHD 3840 x 2160	UHD 3840 x 2160
Brightness	450 cd/m ²	350 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°
Display Colour	1.07B	1.07B
Response Time	5 ms	5 ms
Frequency (H/V)	H: 28 kHz-83 kHz / V: 48 Hz-85 Hz	H: 28 kHz-83 kHz / V: 48 Hz-85 Hz
Input	HDMI 1.4, HDMI 2.0 x 4, VGA, Component (3.5mm), Composite (3.5mm), USB 2.0 x 3, USB 3.0 x 2, USB 2.0 (for OPS), Audio (3.5mm), Microphone (3.5mm)	HDMI 1.4, HDMI 2.0 x 4, VGA, Component (3.5mm), Composite (3.5mm), USB 2.0 x 3, USB 3.0 x 2, USB 2.0 (for OPS), Audio (3.5mm), Microphone (3.5mm)
Output	HDMI 2.0, Composite (3.5 mm)	HDMI 2.0, Composite (3.5 mm)
OS	Android 5.0.1	Android 5.0.1
CPU	1.4GHz Quad Core ARM Cortex A53	1.4GHz Quad Core ARM Cortex A53
Memory	2GB DDR3	2GB DDR3
Storage	16GB Standard	16GB Standard
Built-in Speakers	15W x 2	10W x 2
Product Dimension With Base (W x H x D)	1518.3 x 934.3 x 113.8 mm (59.8" x 36.8" x 4.5") (without base)	1299.9 x 810.8 x 103.5 mm (51.2" x 31.9" x 4.1") (without base)
Product Weight	51.9 Kg (114.4 lb) (without base)	36.8 Kg (81.1 lb) (without base)
VESA Arm/Wall Mounting	500 x 400 mm	300 x 300 mm
Glass Type	Anti-Glare Glass	Anti-Glare Glass
Features	Whiteboard and annotation software, WPS Office Suite App, Content wireless sharing, Infrared Touch Frame Technology, EcoSmart Sensor	Whiteboard and annotation software, WPS Office Suite App, Content wireless sharing, Infrared Touch Frame Technology, EcoSmart Sensor
Remarks	10-point touch for Windows 7/8/10, Android/Linux (kernel version 3.5+) by plug & play, MacOS by UPDD driver 2-point touch for Chrome OS (39 or above) by plug & play	10-point touch for Windows 7/8/10, Android/Linux (kernel version 3.5+) by plug & play, MacOS by UPDD driver 2-point touch for Chrome OS (39 or above) by plug & play

All specifications are subject to change without prior notice.

Professional Desktop / IT

Desktop displays play an essential part in various modern industries. All visual presentations require a desktop display for different applications: Software developers need computers and desktop displays for programming, compiling, and operation, and office workers find desktop displays necessary for their daily work. Selecting a reliable desktop displays have become so basic and crucial for efficiency and convenience.

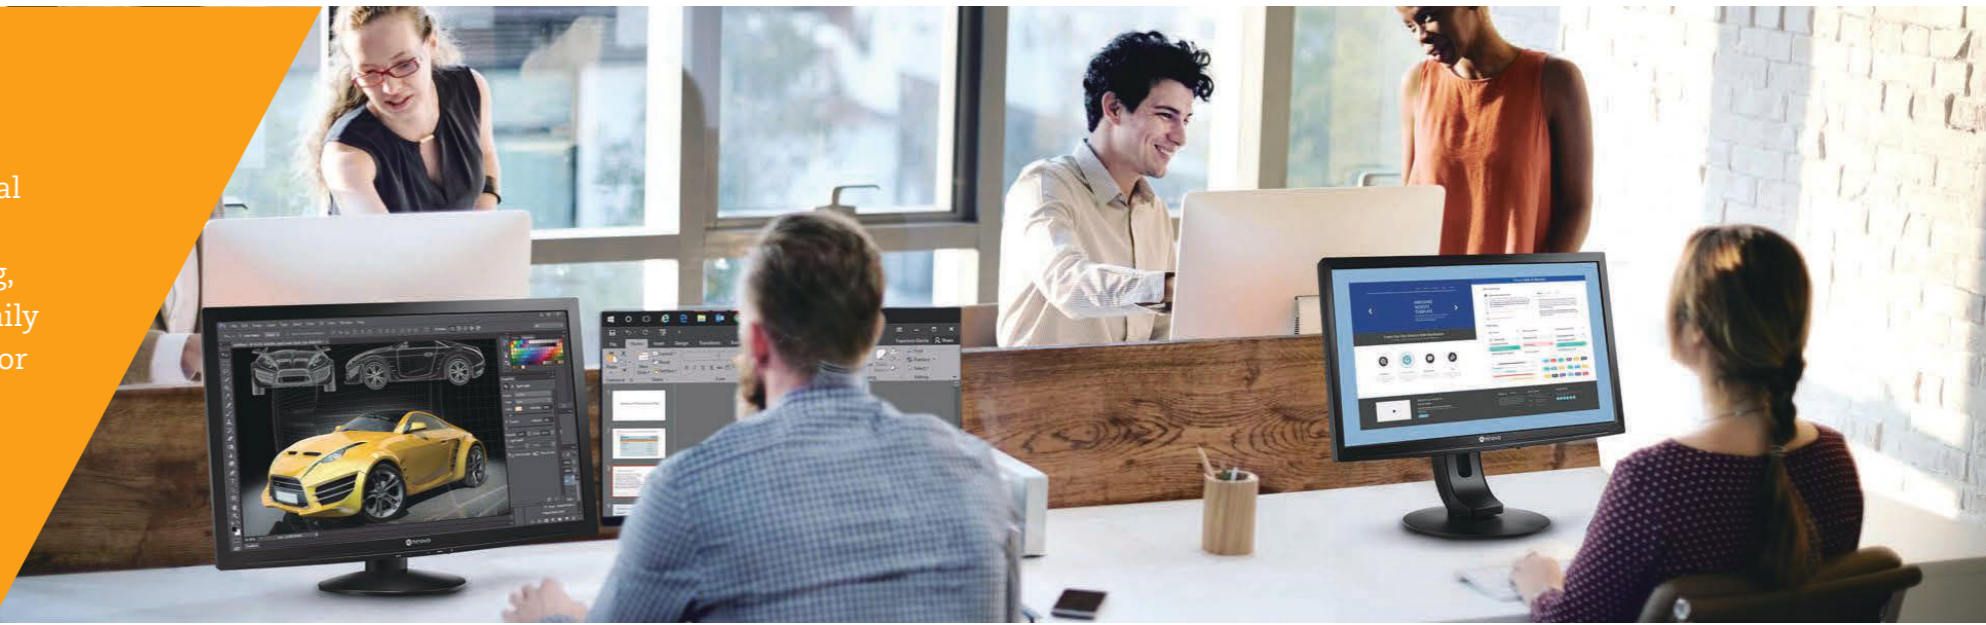

X-Series



LE-Series



Specifications	X-24E	X-22E	X-19E	X-17E	X-15E VA	LE-27E	LE-24E	LE-22E
TFT Panel Size	23.5"	21.5"	19.0"	17.0"	15.0"	27.0"	23.5"	21.5"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	SXGA 1280 x 1024	SXGA 1280 x 1024	XGA 1024 x 768	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	300 cd/m ²	250 cd/m ²	250 cd/m ²	250 cd/m ²	300 cd/m ²	300 cd/m ²	250 cd/m ²	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°	170°/160°	170°/160°	170°/160°	176°/176°	170°/160°	170°/160°	170°/160°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.2M	16.7M	16.7M	16.7M
Response Time	3 ms	3 ms	3 ms	3 ms	5 ms	3 ms	3 ms	3 ms
Frequency (H/V)	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 24 kHz-83 kHz / V: 50 Hz-75 Hz	H: 30 kHz-95 kHz / V: 48 Hz-76 Hz	H: 30 kHz-95 kHz / V: 48 Hz-76 Hz	H: 30 kHz-95 kHz / V: 48 Hz-76 Hz
Input	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, VGA, Audio (3.5 mm)
Output	-	-	-	-	-	Audio (3.5 mm)	Audio (3.5 mm)	Audio (3.5 mm)
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	562.4 x 396.8 x 155.0 mm (22.1" x 15.6" x 6.1")	513.2 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")	445.0 x 420.2 x 175.0 mm (17.5" x 16.5" x 6.9")	409.4 x 398.2 x 175.0 mm (16.1" x 15.7" x 6.9")	380.0 x 359.0 x 155.0 mm (15.0" x 14.1" x 6.1")	642.0 x 533.7 x 249.0 mm (25.3" x 21.0" x 9.8")	566.0 x 510.2 x 249.0 mm (22.3" x 20.1" x 9.8")	505.6 x 494.7 x 248.9 mm (19.9" x 19.5" x 9.8")
Product Weight	7.8 kg (17.2 lb)	6.7 kg (14.7 lb)	6.8 kg (15.0 lb)	6.0 kg (13.2 lb)	4.6 kg (10.1 lb)	7.5 kg (16.5 lb)	5.8 kg (12.8 lb)	5.4 kg (11.9 lb)
VESA Arm/Wall Mounting	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm & 75 x 75 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Glass Type	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	NeoV™ Optical Glass	-	-	-
Features	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Alink, Front-sided IP22	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Alink, Front-sided IP22	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Alink, Front-sided IP22	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Alink, Front-sided IP22	Gamma Selection, Black-level Adjustment, EcoSmart Sensor, Alink, Front-sided IP22	Height Adjustable Stand, Blue Light Filter, Flicker Free	Height Adjustable Stand, Blue Light Filter, Flicker Free	Height Adjustable Stand, Blue Light Filter, Flicker Free
Remarks	Available in black and white	Available in black and white	Available in black and white	Available in black and white	Available in black and white	-	-	-

LW-Series



Specifications	LW-27E	LW-24E	LW-22E	LA-27 VA	LA-24 IPS	LA-22
TFT Panel Size	27.0"	23.5"	21.5"	27.0"	23.8"	21.5"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	300 cd/m ²	250 cd/m ²	250 cd/m ²	330 cd/m ²	270 cd/m ²	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°	170°/160°	170°/160°	178°/178°	178°/178°	170°/160°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	3 ms	3 ms	3 ms	5 ms	5 ms	3 ms
Frequency (H/V)	H: 30 kHz-95 kHz / V: 48 Hz-76 Hz	H: 30 kHz-95 kHz / V: 48 Hz-76 Hz	H: 30 kHz-95 kHz / V: 48 Hz-76 Hz	30 kHz-83 KHz / 56 Hz-75 Hz	30 kHz-83 KHz / 56 Hz-75 Hz	30 kHz-83 KHz / 56 Hz-75 Hz
Input	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, DVI, VGA, Audio (3.5 mm)	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)
Output	Audio (3.5 mm)	Audio (3.5 mm)	Audio (3.5 mm)	Audio (3.5 mm)	Audio (3.5 mm)	Audio (3.5 mm)
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	642.0 x 438.7 x 210.0 mm (25.3" x 17.3" x 8.3")	566.0 x 395.0 x 190.0 mm (22.3" x 15.6" x 7.5")	505.6 x 366.0 x 180.0 mm (19.9" x 14.4" x 7.1")	612.0 x 452.0 x 226.0 mm (24.1" x 17.8" x 8.9")	550.0 x 433.0 x 226.0 mm (21.7" x 17.0" x 8.9")	511.0 x 377.0 x 183.0 mm (20.1" x 14.8" x 7.2")
Product Weight	5.5 kg (12.1 lb)	3.6 kg (7.9 lb)	3.2 kg (7.1 lb)	4.3 kg (9.5 lb)	3.5 kg (7.7 lb)	3.4 kg (7.5 lb)
VESA Arm/Wall Mounting	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Glass Type	-	-	-	-	-	-
Features	Blue Light Filter, Flicker Free	Blue Light Filter, Flicker Free	Blue Light Filter, Flicker Free	Blue-light Filter, Flicker Free	Blue-light Filter, Flicker Free	Blue-light Filter, Flicker Free
Remarks	-	-	-	-	-	-

LH-Series



FS-Series



Specifications	LH-27 VA	LH-24 IPS	LH-22	FS-27 VA	FS-24 IPS
TFT Panel Size	27.0"	23.8"	21.5"	27.0"	23.8"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Brightness	330 cd/m ²	270 cd/m ²	300 cd/m ²	300 cd/m ²	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°	178°/178°	170°/160°	178°/178°	178°/178°
Display Colour	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	5 ms	5 ms	3 ms	5 ms	5 ms
Frequency (H/V)	30 kHz-83 KHz / 56 Hz-75 Hz	30 kHz-83 KHz / 56 Hz-75 Hz	30 kHz-83 KHz / 56 Hz-75 Hz	30 kHz-83 KHz / 50 Hz-76 Hz	30 kHz-83 KHz / 56 Hz-76 Hz
Input	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)	DisplayPort 1.2, HDMI 1.3, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, VGA, Audio (3.5 mm)	DisplayPort, HDMI 1.4, VGA, Audio (3.5 mm)
Output	Audio (3.5 mm)	Audio (3.5 mm)	Audio (3.5 mm)	-	-
Built-in Speakers	2W x 2	2W x 2	2W x 2	2W x 2	2W x 2
Product Dimension With Base (W x H x D)	642.0 x 515.0 x 243.0 mm (25.3" x 20.3" x 9.6")	566.0 x 505.0 x 204.0 mm (22.3" x 19.9" x 8.0")	505.6 x 462.0 x 204.0 mm (19.9" x 21.7" x 8.0")	611.9 x 518.7 x 249.0 mm (24.1" x 20.4" x 9.8")	540.6 x 498.6 x 249.0 mm (21.3" x 19.6" x 9.8")
Product Weight	6.1 (13.4 lb)	4.7 kg (10.4 lb)	4.6 kg (10.3 lb)	6.6 kg (14.5 lb)	5.7 kg (12.5 lb)
VESA Arm/Wall Mounting	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm
Glass Type	-	-	-	-	-
Features	Blue-light Filter, Flicker Free	Blue-light Filter, Flicker Free	Blue-light Filter, Flicker Free	Blue-light Filter, Flicker Free	Blue-light Filter, Flicker Free
Remarks	-	-	-	-	-

Display Mounts & Enclosures


Installation methods and display accessories play an important role for display deployments in the application locations. Suppliers need to offer various mounting devices so that users can easily find the suitable solutions that meet their requirements. All related accessories are also needed to be available to increase user's application efficiency and performance.



Ceiling Mounts



		CMP-01+ LMK-01	CMP-01+LMK-02	CMP-01+WMK-03
Mounting	VESA Standard	Max. 725.0 x 450.0 mm	Max. 440 x 330 mm	100 x 100 mm / 200 x 100 mm / 200 x 200 mm
Loading	Weight Capacity	60.0 kg (132.3 lb) Per side	60.0 kg (132.3 lb) Per side	60.0 kg (132.3 lb) Per side
Adjustment	Swivel	360°	360°	360°
	Height	924.0-1424.0 mm (36.4"-56.1")	924.0-1424.0 mm (36.4"-56.1")	924.0-1424.0 mm (36.4"-56.1")
Exterior	Material	Steel	Steel	Steel
	Colour	Black	Black	Black
Dimensions	Net (W x H x D)	788.0 x 1,424.0 x 401.0 mm (31.0" x 56.1" x 15.7")	508.0 x 1,424.0 x 338.0 mm (20.0" x 56.1" x 13.3")	248.0 x 1,424.0 x 216.0 mm (9.8" x 56.1" x 8.6")
	Packing (W x H x D)	CMP-01 Box : 975.0 x 270.0 x 229.0 mm (38.4" x 10.6" x 9.0") LMK-01 Box : 836.0 x 245.0 x 54.0 mm (32.9" x 9.7" x 2.1")	CMP-01 Box : 975.0 x 270.0 x 229.0 mm (38.4" x 10.6" x 9.0") LMK-02 Box : 556.0 x 245.0 x 54.0 mm (21.9" x 9.6" x 2.1")	CMP-01 Box : 975.0 x 270.0 x 229.0 mm (38.4" x 10.6" x 9.0") WMK-03 Box : 244.0 x 267.0 x 54.0 mm (9.6" x 10.5" x 2.1")
Weight	Net Weight	11.9 kg (24.9 lb)	10.6 kg (23.4 lb)	9.0 kg (19.8 lb)
	Gross Weight	13.7kg (30.2 lb)	12.1 kg (26.8 lb)	10.1 kg (22.3lb)

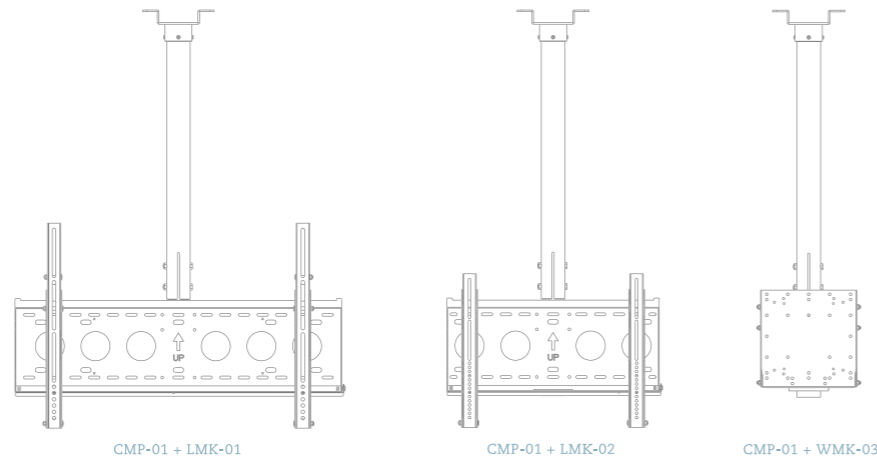

Video Wall Mounts



		VWM-01	VWM-02
Mounting	VESA Standard	Max. 400 x 400 mm	Max. 400 x 400 mm
Loading	Weight Capacity	80.0 kg (176.4 lb)	80.0 kg (176.4 lb)
Adjustment	Up	3.25 mm	3.25 mm
	Down	3.25 mm	3.25 mm
	Left	15.0 mm	24.5 mm
	Right	15.0 mm	24.5 mm
Exterior	Material	Steel and Aluminium	Steel and Aluminium
	Colour	Black and Silver	Black and Silver
Dimensions	Net (W x H x D)	500.0 x 526.0 x 93.0 mm (19.7" x 20.7" x 3.7")	500.0 x 532.0 x 93.0-293.0 mm (19.7" x 20.9" x 3.7"-11.5")
	Packing (W x H x D)	560.0 x 90.0 x 250.0 mm (22.0" x 3.5" x 9.8")	560.0 x 90.0 x 250.0 mm (22.0" x 3.5" x 9.8")
Weight	Net Weight	4.5 kg (9.92 lb)	7.3 kg (116.1 lb)
	Gross Weight	5.5 kg (12.0 lb)	-

Video Wall Accessories



		VWA-01	VWA-04
Mounting	VESA Standard	Depend on AG Neovo display mount kits	Depend on AG Neovo display mount kits
Loading	Weight Capacity	80.0 kg (176.4 lb)	80.0 kg (176.4 lb)
Exterior	Material	Aluminium	Metal
	Colour	Silver	Black and Silver
Dimensions	Net (L x H x D)	2000.0 x 60.0 x 40.0 mm (78.7" x 2.4" x 1.6")	40.0 x 40.0 x 40.0 mm (1.6" x 1.6" x 1.6")
Weight	Net Weight	750.0 g (1.7 lb)	80.0 g (0.2 lb)

Wall Mounts



		LMA-01	WMA-01
Mounting	VESA Standard	Max. 400 x 400 mm	75 x 75 mm / 100 x 100 mm / 200 x 100 mm / 200 x 200 mm
Loading	Weight Capacity	35.0 kg (77.2 lb)	25.0 kg (55.1 lb)
Adjustment	Swivel	-90° to 90°	-90° to 90°
	Tilt	-15° to 15°	-15° to 15°
Extension	Max. Distance to Wall	562.0 mm (22.1")	469.0 mm (18.5")
	Min. Distance to Wall	105.0 mm (4.1")	70.0 mm (2.8")
Exterior	Material	Steel, Aluminium alloy, Plastic	Steel, Aluminium alloy, Plastic
	Colour	Black & Silver	Black & Silver
Dimensions	Net (W x H x D)	500.0 x 450.0 x 105.0 mm (19.7" x 17.7" x 4.1")	345.0 x 285.0 x 469.0 mm (13.6" x 11.2" x 18.5")
	Packing (W x H x D)	624.0 x 124.0 x 460.0 mm (24.6" x 4.9" x 18.1")	347.0 x 98.0 x 327.0 mm (13.7" x 3.9" x 12.9")
Weight	Net Weight	7.8 kg (17.2 lb)	3.1 kg (6.9 lb)
	Gross Weight	9.3 kg (20.4 lb)	3.9 kg (8.5 lb)



		WMK-03	WMK-01	PMK-01
Mounting	VESA Standard	100 x 100 mm / 200 x 100 mm / 200 x 200 mm	75 x 75 mm / 100 x 100 mm	75 x 75 mm / 100 x 100 mm
Loading	Weight Capacity	60.0 kg (132.3 lb)	18.0 kg (40.0 lb)	14.0 kg (30.9 lb)
Adjustment	Rotation	-	-	270°
	Swivel	-	-	-90° to 90°
	Tilt	-15° to 0°	-	-90° to 90°
Exterior	Material	Steel	Steel	Steel and die-cast aluminium
	Colour	Black	Black	Black
Dimensions	Net (W x H x D)	248.0 x 230.0 x 45.0 mm (9.8" x 9.1" x 1.8")	130.0 x 140.0 x 20.0 mm (5.1" x 5.5" x 0.8")	115.0 x 115.0 x 131.0 mm (4.5" x 4.5" x 5.2")
	Packing (W x H x D)	244.0 x 55.0 x 267.0 mm (9.6" x 2.1" x 10.5")	135.0 x 175.0 x 27.0 mm (5.3" x 6.9" x 1.1")	120.0 x 120.0 x 145.0 mm (4.8" x 4.8" x 5.7")
Weight	Net Weight	2.2 kg (4.9 lb)	0.36 kg (0.79 lb)	1.5 kg (3.3 lb)
	Gross Weight	2.3 kg (5.1 lb)	0.42 kg (0.93 lb)	1.6 kg (3.5 lb)



		LMK-01	LMK-02	LMK-03
Mounting	VESA Standard	Max. 725 x 450 mm	Max. 440 x 330 mm	Max. 800 x 500 mm
Loading	Weight Capacity	80.0 kg (176.4 lb)	80.0 kg (176.4 lb)	100.0 kg (220 lb)
	Tilt	-15° to 0°	-15° to 0°	-15° to 15°
Exterior	Material	Steel	Steel	Steel
	Colour	Black	Black	Black
Dimensions	Net (W x H x D)	788.0 x 490.0 x 48.0 mm (31.0" x 19.3" x 1.9")	508.0 x 368.0 x 48.0 mm (20.0" x 14.5" x 1.9")	840.0 x 574.0 x 75.0 mm (33.1" x 22.6" x 3.0")
	Packing (W x H x D)	836.0 x 245.0 x 54.0 mm (32.9" x 9.6" x 2.1")	556.0 x 245.0 x 54.0 mm (21.9" x 9.7" x 2.1")	854.0 x 289.0 x 274.0 mm (33.6" x 11.4" x 10.8")
Weight	Net Weight	5.1 kg (11.2 lb)	3.8 kg (8.3 lb)	4.4 kg (9.6 lb)
	Gross Weight	5.9 kg (13.0 lb)	4.4 kg (9.6 lb)	5.1 kg (11.3 lb)

Desk Mounts



		ES-02	DMS-01D	DMS-01Q
Mounting	VESA Standard	75 x 75 mm / 100 x 100 mm	75 x 75 mm / 100 x 100 mm	75 x 75 mm / 100 x 100 mm
Loading	Weight Capacity	2.0–8.0 kg (4.4–17.6 lb)	12.0 kg (26.5 lb) per hinge	8.0 kg (17.6 lb) per hinge
Adjustment	Rotation	90° (Landscape/Portrait)	360° (Default: 90°)	360° (Default: 90°)
	Swivel	360°	-20° to 20° per hinge	-20° to 20° per hinge
	Tilt	-5° to 25°	-20° to 20° per hinge	-20° to 20° per hinge
	Lift	-	-	-
Exterior	Material	Plastic	Steel, Aluminium alloy, Plastic	Steel, Aluminium alloy, Plastic
	Colour	Black	Black & Silver	Black & Silver
Dimensions	Net (W x H x D)	222.0 x 432.0 x 252.0 mm (8.7" x 17.0" x 9.9")	672.0 x 370.0 x 240.0 mm (26.5" x 18.5" x 5.7")	672.0 x 730.0 x 240.0 mm (26.5" x 28.7" x 9.4")
	Packing (W x H x D)	260.0 x 95.0 x 460.0 mm (10.2" x 3.7" x 18.1")	474.0 x 95.0 x 273.0 mm (18.7" x 3.7" x 10.7")	458.0 x 205.0 x 277.0 mm (18.0" x 8.1" x 10.9")
Weight	Net Weight	3.1 kg (6.8 lb)	3.1 kg (6.8 lb)	6.3 Kg (13.9 lb)
	Gross Weight	3.6 kg (7.9 lb)	3.6 kg (8.0 lb)	6.8 kg (14.9 lb)




		DMC-01	DMC-02D
Mounting	VESA Standard	75 x 75 mm / 100 x 100 mm	75 x 75 mm / 100 x 100 mm
Loading	Weight Capacity	10.0 kg (22.0 lb)	12.0 kg (26.5 lb) per hinge
Adjustment (Mounting Bracket)	Rotation	360°	360° (Default: 90°)
	Swivel	-90° to 90°	-20° to 20° per hinge
	Tilt	-20° to 90°	-20° to 20° per hinge
Adjustment (Arm)	Lift	315.0 mm of Increment (-30° - 65°)	-
	Swivel	360°	-
Exterior	Material	Steel, Aluminium alloy, Plastic	Steel, Aluminium alloy, Plastic
	Colour	Black & Silver	Black
Dimensions	Net (W x H x D)	620.0 x 656.0 x 158.0 mm (24.4" x 25.8" x 6.2")	672.0 x 470.0 x 144.0 mm (26.5" x 18.5" x 5.7")
	Packing (W x H x D)	463.0 x 143.0 x 218.0 mm (18.2" x 5.6" x 8.6")	602.0 x 143.0 x 218.0 mm (23.7" x 5.6" x 8.6")
Weight	Net Weight	3.0 kg (6.6 lb)	3.8 kg (8.3 lb)
	Gross Weight	3.9 kg (8.6 lb)	4.0 kg (8.9 lb)

Handles



		HDL-01	HDL-02
Compatible Models	Displays	DR-17 / DR-17P / DR-17E	DR-22 / DR-22E / MX-22 / MX-24
Exterior	Material	Metal	Metal
	Colour	White	White
Dimensions	Net (W x H x D)	295.0 x 58.0 x 27.5 mm (11.6" x 2.3" x 1.1")	295.0 x 63.5 x 22.0 mm (11.6" x 2.5" x 0.9")
	Packing (W x H x D)	320.0 x 75.0 x 40.0 mm (12.6" x 3.0" x 1.6")	320.0 x 75.0 x 40.0 mm (12.6" x 3.0" x 1.6")
Weight	Net Weight	0.4 kg (0.8 lb)	0.4 kg (0.8 lb)
	Gross Weight	0.5 kg (0.9 lb)	0.5 kg (0.9 lb)

Floor Mounts

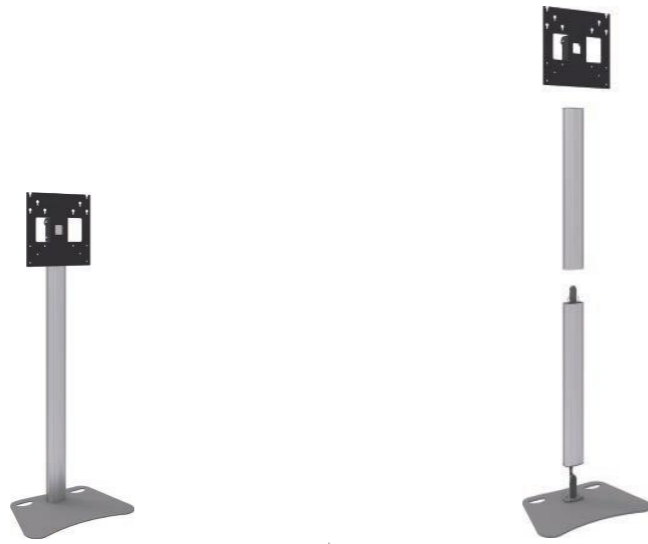

		FMS-01	FMS-02
Mounting	Display	Max. 65" Displays	Max. 65" Displays
	VESA Standard	Max. 400 x 400 mm	Max. 400 x 400 mm
Loading	Weight Capacity	30.0 kg (66.1 lb)	30.0 kg (66.1 lb)
Adjustment	Tilt	-	-
	Lift (Max. centre display)	1835.0 mm (72.2")	1826.0 mm (71.9")
Exterior	Material	Steel and Aluminium	Steel and Aluminium
	Colour	Dark grey and Silver	Dark grey and Silver
Dimensions	Net (W x H x D)	725.0 x 1911.0 x 480.0 mm (28.6" x 75.2" x 18.9")	725.0 x 1924.0 x 480.0 mm (28.5" x 75.7" x 18.9")
	Packing (W x H x D)	525.0 x 1,950.0 x 160.0 mm (20.7" x 76.8" x 6.3")	480.0 x 1060.0 x 160.0 mm (20.5" x 43.0" x 70.9")
Weight	Net Weight	26.0 kg (57.3 lb)	26.0 kg (57.3 lb)
	Gross Weight	32.0 kg (70.5 lb)	36.0 Kg (79.4 lb)



		FMC-02	FMC-03 + LMK-04	FMC-04 + LMK-04
Mounting	Display	32" - 65" Displays	46" - 90" Displays	46" - 98" Displays
	VESA Standard	Max. 400 x 400 mm	Max. 800 x 600 mm	Max. 800 x 600 mm
Loading	Weight Capacity	30.0 kg (66.1 lb)	85.0 kg (187.4 lb)	125 kg (275.6 lb)
Adjustment	Tilt	-	-	-
	Lift (Max. centre display)	1826.0 mm (71.9") (max. centre display)	1,818 mm (71.6") (max. centre display)	1810 mm (71.3") (max. centre display)
Exterior	Material	Steel and Aluminium	Aluminium	Aluminium
	Colour	Dark grey and Silver	Dark grey and Silver	Dark grey and Silver
Dimensions	Net (W x H x D)	973.0 x 1896.0 x 641.0 mm (38.3" x 74.6" x 25.2")	1100.0 x 2133.0 x 662.5 mm (43.3" x 84.0" x 26.1")	1400.0 x 2125.0 x 800.0 mm (55.1" x 83.7" x 31.5")
	Packing (W x H x D)	680.0 x 1,860.0 x 180.0 mm (26.8" x 73.2" x 7.1")	FMC-03 Box : 1,200.0 x 2,050.0 x 800.0 mm (47.2" x 80.7" x 31.5") LMK-04 Box : 930.0 x 280.0 x 80.0 mm (36.6" x 11.0" x 3.1")	FMC-04 Box : 1,550.0 x 2,100.0 x 860.0 mm (61.0" x 82.7" x 33.9") LMK-04 Box : 930.0 x 280.0 x 80.0 mm (36.6" x 11.0" x 3.1")
Weight	Net Weight	21.5 kg (47.4 lb)	68.8 kg (151.7 lb)	76.7 kg (169.1 lb)
	Gross Weight	25.0 kg (55.1 lb)	90.7 kg (200.0 lb)	95.7 kg (211.0 lb)

Stands



		STD-02A	STD-03A	STD-04	STD-05
Compatible Models	Displays	HX-32 / QX-32 / RX-32 / TX-32	HX-42 / RX-42 / QX-43 / QX-55 / TX-42 / TX-32P / TX-42P	PD-42 / PD-49 / PD-55 / PN-46 / RX-42E / RX-55E / HX-42E / HX-55E	PN-46D / PN-55D / PN-55H / PS-46 / PS-55
Exterior	Material	Metal	Metal	Metal & Plastic	Metal & Plastic
	Colour	Black	Black	Black	Black
Dimensions	Net (W x H x D)	193.0 x 137.2 x 82.0 mm (7.6" x 5.4" x 3.2") Per Piece	320.0 x 219.7 x 118.8 mm (12.5" x 8.7" x 4.7") Per Piece	330.0 x 126.0 x 75.0 mm (13.0" x 5.0" x 3.0") Per Piece	400.0 x 127.0 x 65.0 mm (12.5" x 5.0" x 2.6") Per Piece
	Packing (W x H x D)	230.0 x 206.0 x 103 mm (9.1" x 8.1" x 4.1")	333.0 x 291.0 x 139.0 mm (13.1" x 11.5" x 5.5")	398.0 x 244.0 x 124.0 mm (15.7" x 8.8" x 4.9")	446.0 x 221.0 x 177.0 mm (17.6" x 8.7" x 7.0")
Weight	Net Weight	0.6 kg (1.3 lb)	1.3 kg (2.8 lb)	1.7 kg (3.7 lb)	2.1 kg (4.6 lb)
	Gross Weight	1.3 kg (2.8 lb)	2.3 kg (5.1 lb)	2.1 kg (4.6 lb)	2.6 kg (5.7 lb)



		STD-06	STD-07	STD-08	STD-09
Compatible Models	Displays	PM-32	PM-43 / PM-48 / PM-55 / QM-43 / QM-55 / QM-43A / QM-55A	PM-65 / PM-65P / QM-65 / QM-65A	RX-32E / HX-32E
Exterior	Material	Metal & Plastic	Metal & Plastic	Metal & Plastic	Metal & Plastic
	Colour	Black	Black	Black	Black
Dimensions	Net (W x H x D)	240.0 x 113.0 x 60.0 mm (9.4" x 4.4" x 2.4") Per Piece 23.1 x 97.8 x 64.0 mm (0.9" x 4.4" x 2.4") Per Piece	330.0 x 126.0 x 75.0 mm (13.0" x 5.0" x 3.0") Per Piece 23.1 x 97.8 x 64.0 mm (0.9" x 4.4" x 2.4") Per Piece	400.0 x 726.0 x 65.0 mm (15.7" x 28.6" x 2.6") Per Piece	240.0 x 113.0 x 60.0 mm (9.4" x 4.4" x 2.4") Per Piece
	Packing (W x H x D)	290.0 x 90.0 x 93.0 mm (11.4" x 3.5" x 3.7")	398.0 x 244.0 x 124.0 mm (15.7" x 8.8" x 4.9")	776.0 x 321.0 x 155.0 mm (30.6" x 12.6" x 6.1")	290.0 x 90.0 x 93.0 mm (11.4" x 3.5" x 3.7")
Weight	Net Weight	1.5 kg (3.3 lb)	1.9 kg (4.2 lb)	5.0 kg (11.0 lb)	1.3 kg (2.8 lb)
	Gross Weight	1.7 kg (3.7 lb)	2.3 kg (5.1 lb)	6.0 kg (13.2 lb)	1.5 kg (3.3 lb)

Display Enclosure



LOC-55

Loading	Applicable Sizes	55", depth max. 120 mm
Power	Power Supply	230V AC/ 50Hz
	Power Consumption	min. 25W - max. 500W (without display and PC)
Temperature	Control	Industrial fans, heating module x 2, temperature control sensor x 2
	Operating Temperature	-20° to 40°C
Exterior	Enclosure	Steel
	Glass	6,4 mm laminated safety glass, Anti-reflective
	Protection Class/ IP Rating	IP65 (Front), IP54 (Back), NEMA 4
	Doors	Lock x 2, 4 keys
	Colour	Anthracite, DB 703 fine structure
Dimension	Net (WxHxD)	1410.0 x 881.0 x 200.0 mm (55.5" x 34.6" x 7.9")
	Packaging (WxHxD)	1460.0 x 931.0 x 250.0 mm (57.5" x 36.7" x 9.8")
Weight	Net Weight	62.0 kg (136.7 lb)
	Gross Weight	69.0 kg (152.1 lb)
Accessory	Optional	Stand (LOF-55)

Video Extenders



HIP-Series

Units	HIP-TA	HIP-RA
Unit Description	HDMI 1.3 Transmitter	HDMI 1.3 Receiver
HDMI Compliance	HDMI 1.3c	
HDCP Compliance	Yes	
Video Bandwidth	M-JPEG technology to process image compressing GIGABIT (10/1000) over LAN	
Video Resolutions	480i / 480p / 720p / 1080i / 1080p60	
HDMI Transmission Range	Full HD: (1080p)-100 m (330 feet) (CAT5e) / 120 m (365 feet) (CAT6)HD: (720p/1080i)-100 m (330 feet) (CAT5e) / 120 m (365 feet) (CAT6)	
Audio Support	Surround Sound (up to 7.1 ch) or Stereo Digital Audio	
ESD Protection	[1] Human body model — ±15kV [air-gap discharge] & ±8kV [contact discharge] [2] Core chipset — ±8kV	
Input	1 x RJ45 / 1 x HDMI	
Output	1 x RJ45 / 1 x HDMI	
Dimensions (L x W x H)	110.0 x 58.0 x 26.0 mm (4.3" x 2.2" x 1.0")	
Weight	245.0 g	
Power Supply	2 x DC 5V/1A	
Power Consumption	3W Max Each	
Operating Temperature	0° to 40°C (32° to 104°F)	
Storage Temperature	-20° to 60°C (-4° to 140°F)	
Relative Humidity	20-90% RH (no condensation)	

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d Ijssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

