

# PNM-9031RV

15MP H.265 Panoramic Camera



FC | UL LISTED | CE | ENEC




## Key Features

- 15MP 192° panoramic stitched image
- Panoramic channel
- IR viewable length 20m (65.6ft), WiseIR
- H.265 / H.264 : Maximum framerate 20fps
- MJPEG : Maximum frame rate 15fps
- H.265, H.264, MJPEG codec, WiseStreamII supported
- Motion, Defocus detection, Virtual line, Enter / Exit
- (Dis)Appear, Audio detection, Motion detection, Handover, Heatmap
- microSD/SDHC/SDXC 2 slots, PoE+,
- IP66, IK10, NEMA4X
- TPM 2.0 (FIPS 140-2 level 2)

Video	
Imaging Device	1/2.8" 5MP CMOS (x4)
Resolution	6720x2240, 5952x1984, 4992x1664, 3840x1280, 3072x1024, 1920x640, 1152x384
Max. Framerate	H.265/H.264: Max. 20fps/20fps(60Hz/50Hz) MJPEG: Max. 15fps(60Hz/50Hz)
Min. Illumination	Color: 0.1Lux(F1.6, 1/30sec) BW: 0.01Lux(F1.6, 1/30sec), 0Lux(IR LED on)
Video Out	USB : Micro USB Type B, 1280x720 for installation
Lens	
Focal Length (Zoom Ratio)	4.3mm Fixed
Max. Aperture Ratio	F1.6
Angular Field of View	192°(H) x 56.6°
Min. Object Distance	(V) 5m (16.4ft)
Focus Control	Fixed
Pan / Tilt / Rotate	
Pan / Tilt / Rotate Range	0~355 / 0~60 / 360°
Operational	
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR V
Motion Detection	8ea, 8point polygonal zones
Privacy Masking	6ea, rectangular zones - Color: Grey/Green/Red/Blue/Black/White
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (2~1/12,000sec)
Video Rotation	Flip, Mirror
Analytics	Defocus detection, Motion detection, Appear/Disappear, Enter/Exit, Tampering, Virtual line, Audio detection
Business Intelligence	Heatmap
Alarm I/O	Selectable 2 port
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail Notification via e-mail SD/SDHC/SDXC at event triggers Alarm output
Audio In	Selectable(mic in/line in) Supply voltage: 2.5VDC(4mA), Input impedance: 2K Ohm
Audio Out	Line out, Max.output level: 1Vrms

<b>IR Viewable Length</b>	Wise IR 20m(65.6ft), 4 independent zones with Auto/Manual level adjustment
<b>Network</b>	
<b>Ethernet</b>	Metal shielded RJ-45(10/100/1000BASE-T)
<b>Video Compression</b>	H.265/H.264: Main/High, MJPEG
<b>Audio Compression</b>	G.711 u-law /G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz G.726: 16Kbps, 24Kbps, 32Kbps, 40Kbps AAC-LC: 48Kbps at 16KHz
<b>Smart Codec</b>	Manual(5ea area), WiseStream II
<b>Bitrate Control</b>	H.264/H.265: CBR or VBR MJPEG: VBR
<b>Streaming</b>	Unicast(20 users) / Multicast Multicast Multiple streaming(Up to 4 profiles)
<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP
<b>Security</b>	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access log 802.1X Authentication(EAP-TLS, EAP-LEAP) Device Certificate(Hanwha Techwin Root CA) TPM 2.0 with FIPS 140-2 level 2
<b>Application Programming Interface</b>	ONVIF Profile S/G/T SUNAPI(HTTP API)
<b>General</b>	
<b>Webpage Language</b>	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
<b>Edge Storage</b>	Micro SD/SDHC/SDXC 2 slots 512GB (256GBx2) SD card encryption support
<b>Memory</b>	8GB RAM, 4GB Flash
<b>Environmental &amp; Electrical</b>	
<b>Operating Temperature / Humidity</b>	- Normal : -40°C~+55°(-40°F ~ +131°F) / - Intermittent : -40°C~+60°C(-40°F ~ +140°F), 8Hrs - Less than 95% RH(Non-condensing) * Startup should be above -30°C “
<b>Storage Temperature / Humidity</b>	-50°C~+60°C(-58°F~+140°F) / Less than 90% RH
<b>Certification</b>	IP66, IK10, NEMA4X
<b>Input Voltage</b>	PoE+ (IEEE802.3at, Class4), 12VDC
<b>Power Consumption</b>	PoE+: Max 23.5W, Typical 18.0W 12VDC: Max 20.5W, Typical 16.0W
<b>Mechanical</b>	
<b>Color / Material</b>	White / Aluminum Hard-coated dome bubble
<b>RAL Code</b>	RAL9003
<b>Product Dimensions / Weight / Gangbox</b>	Ø253x170mm / 5.7lb (2.6Kg) / Single, Double, 4" Square, Octagon

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

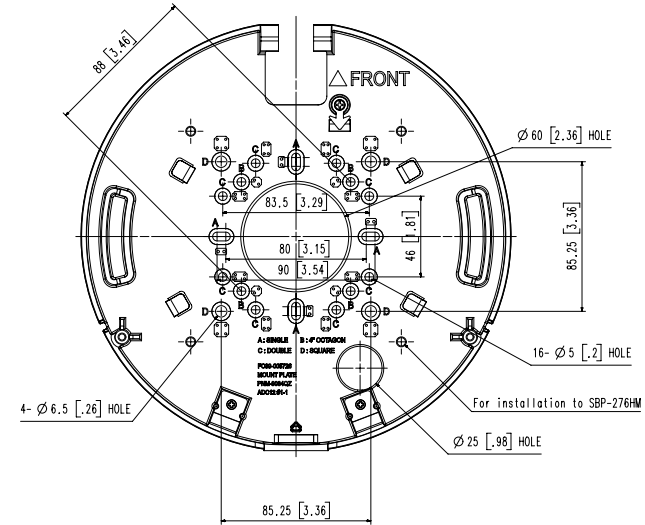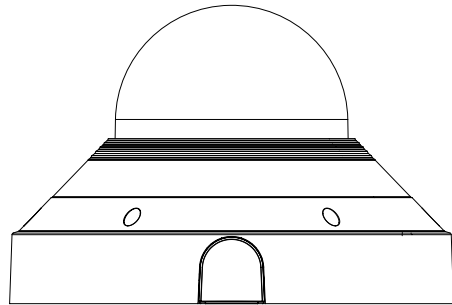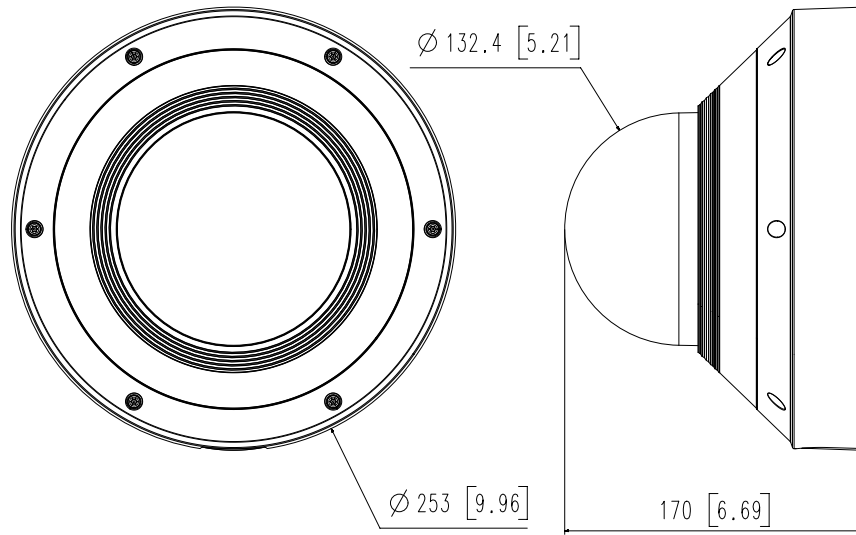

3		
2		
1	PNM-9031RV	21.02.10
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/1
Hanwha Techwin		